

TWIN-FRAME ALL-WELDED SPORT LOCKERS



**LIFETIME
WARRANTY**



**TWIN FRAME
ALL-WELDED**



THE ULTIMATE ATHLETIC LOCKER

Our complete line-up of open-front sport lockers is a collection of specialty lockers engineered for high school, collegiate and professional team organizations who demand high performance equipment storage solutions.

Our Pro-Sport Twin-Frame all-welded open-front athletic lockers are designed to accommodate the storage of a wide variety of athletic gear and apparel while allowing maximum ventilation.

Base model Pro-Sport locker includes one upper hat shelf with a compliment of coat hooks. You can add a choice from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area. You can complete your Pro-Sport locker with our optional stainless steel coat rod.

Our Twin-Frame design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation. Pro-Sport lockers are engineered to last the lifetime of your facility. We guarantee it!

Shown with optional
12" wide security box,
stainless steel coat rod
and foot locker/seat

PRO-SPORT LOCKER SIZES:

Widths 18", 24", 30", 33" & 36"

Depths 16", 18", 22"

Column Heights 60", 72", 84"

Note: Pro-Sport lockers will ship in multiple column units up to 60" wide to meet individual jobsite conditions.

Optional integral slope top 16 gauge steel, runs continuous across a multiple column unit and is MIG welded at the factory replacing welded locker unit flat top. Sides are sloped at top providing rigid support beneath the slope top between each locker column.



4.5.7

VISIT www.ArtMetalProducts.com for more information.



FEATURES & OPTIONS

CONFIGURATIONS DESIGNED TO MEET YOUR LOCKER NEEDS

UPPER OPTIONS



Open top shelf with under hang hooks



Upper wallet security box with stainless steel coat rod



12" wide security box with stainless steel coat rod



Full width security box with stainless steel coat rod



Wallet and 12" wide Security boxes have single-point thru-the-door projecting Antimicrobial finger pulls for protection against bacteria.

LOWER OPTIONS



Open lower



Reinforced seat



Foot locker with reinforced seat



Underside of foot locker seat is reinforced to support today's athlete

ADDITIONAL OPTIONS



Shoulder pad rack



Shoulder pad rack with helmet support



2" or 3" Padded seat cushion

A POPULAR CONFIGURATION

Shown here with full width security compartment, stainless steel coat rod and lower shelf/seat. Both security compartment sides are ventilated. See page 88 for color selections.

LOCKER SIZES

Widths 18", 24", 30", 33", 36"

Depths 12", 16", 18", 22"

Nominal Heights 60", 72", 84"

FEATURES

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

SECURITY BOX DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available.

HINGES: 16 gauge continuous piano type

OPTIONAL LOWER SEAT/SHELF: Shall be 16 gauge 1" with a reinforcing bar welded to lower front for rigidity.

OPTIONAL FOOT LOCKER: 14 gauge cold rolled steel with Secure-Air-Flow mini louvers ventilation, seat opens for storage.

STANDARD: hat shelf and two single prong wall hooks, one double prong ceiling hook.



AMP-1002 CHAMP ATHLETIC LOCKERS




**LIFETIME
WARRANTY**



**TWIN FRAME
ALL-WELDED**

Our stylish Twin-Frame all-welded locker with the deep-drawn seamless stainless steel recessed handle is the perfect choice for the demanding designer.

These are our most popular athletic lockers and for good reason. AMP-1002 lockers incorporate our proven gravity lift-type latching mechanism for a smooth, quiet and dependable operation. Champ Athletic lockers are perfect for use in combination with welded box lockers in P.E. locker rooms.

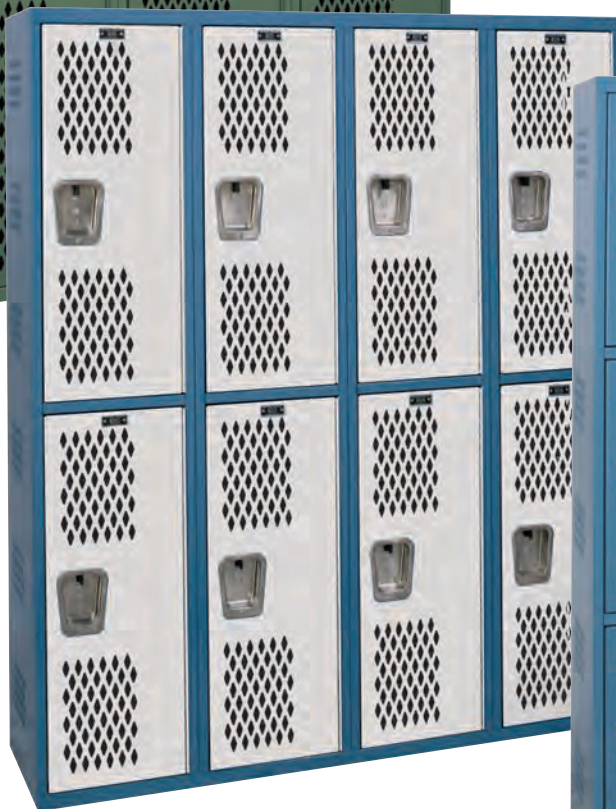

STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Column Heights 36", 48", 60", 72"

DOUBLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Opening Heights 24", 30", 36"

Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Opening Heights 20", 24"

Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions



AMP-1006 ATHLETIC BOX LOCKERS


**QUALITY, DURABILITY AND PRACTICAL
STORAGE SOLUTIONS**


**CHOOSE FROM 16 COMBINATIONS TO MEET
YOUR EXACT LOCKER NEEDS.**



AMP COMBINATION P.E. LOCKERS

The design flexibility of our all-welded athletic lockers allows us to mix and match wardrobe lockers with box lockers to meet any configuration and/or ratio your facility may demand. Please contact our **Sales Manager at 1-800-252-5633**. We will help you to create an environment that will be both esthetically pleasing and functional.

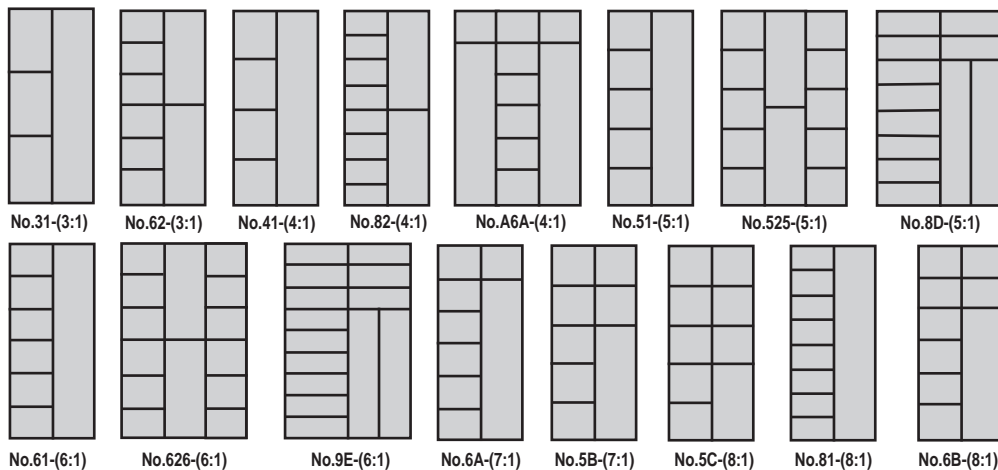



AMP-1003 CHAMP CORRIDOR LOCKERS



**LIFETIME
WARRANTY**



**TWIN FRAME
ALL-WELDED**

With louvered doors, solid sides and our deep-drawn seamless stainless steel recessed handle with gravity lift-type latching mechanism, our AMP-1003 lockers are the top choice for corridor and staff lockers.



THE NEW Z-TIER UNIBODY LOCKERS creates a unique multi-height storage with extended hanging space on one side and built in shelf on the other, its like a two tier with the space of a single tier.

STANDARD SIZES FOR ALL TWIN-FRAME ALL-WELDED WARDROBE LOCKERS

SINGLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Column Heights 36", 48", 60", 72"

DOUBLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Opening Heights 24", 30", 36"

Column Heights 48", 60", 72"

TRIPLE TIER

Widths 9", 12", 15", 18", 24"

Depths 12", 16", 18", 22"

Opening Heights 20", 24"

Column Heights 60", 72"

Z-STYLE

Widths 12", 15", 18"

Depths 12", 16", 18", 22"

Opening Heights 24/36", 30/42"

Column Heights 60", 72"

All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions



STANDARD KD WARDROBE LOCKERS

2 YEAR WARRANTY



STANDARD



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge

SINGLE TIER
Provides ample height for hanging of full length garments.

DOUBLE TIER
Where full length hanging of garments is not required double tier lockers offer an economical alternative.

TRIPLE TIER
Triple tier lockers are ideal for use where storage of long garments is not required.

MAX OPTION **UPGRADE** all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.



STANDARD KD WARDROBE LOCKER SIZES

TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
SINGLE TIER	9" 12" 15" 18" 24"	12" 15" 18" 21" 24"	36" 48" 60" 72"	36" 48" 60" 72"
DOUBLE TIER	9" 12" 15" 18"	12" 15" 18" 21" 24"	30" 36"	60" 72"
TRIPLE TIER	9" 12" 15"	12" 15" 18" 21" 24"	20" 24"	60" 72"

FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide are standard. Secure-Air-Flow, Safety-View and diamond perforated door styles are available. See Standard Quiet lockers on page 38 for plain door option

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher
- 2-point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

HOOKS: 2-single hooks and 1-double hook is standard.
1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

4.5.7

VISIT www.ArtMetalProducts.com for more information.

STANDARD KD BOX LOCKERS

2 YEAR WARRANTY



STANDARD



Single-point thru-the-door projecting Antimicrobial finger pull padlock hasp for protection against bacteria. (shown with optional Padlock Strike Plate)

STANDARD



16 gauge continuous piano hinge



OPTION
STRIKE PLATE
Padlock Strike Plates for box doors protect finish from being marred by padlock



UPGRADE all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks.

STANDARD KD BOX LOCKER SIZES

TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
FOUR TIER	12" 15"	12" 15" 18"	15" 18"	60" 72"
FIVE TIER	12" 15"	12" 15" 18"	12" 14.4"	60" 72"
SIX TIER	12" 15"	12" 15" 18"	12"	72"



FEATURES

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

NOTES: All production KD lockers are supplied without legs unless otherwise specified.

HOOKS: None

4.5.7

VISIT www.ArtMetalProducts.com for more information.

HEAVY-DUTY VENTILATED (HDV) KD LOCKERS

2 YEAR WARRANTY

HDV Lockers are the perfect choice and offer exceptional value. When budget limitations do not allow for all-welded athletic lockers, Heavy-Duty Ventilated "HDV" lockers are the perfect alternative.



Double Tier
1-Wide



Six Tier
1-Wide



ELITE SERIES HDV LOCKERS include our 3" wide 18 gauge full height door stiffener welded to the inner door face providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Elite Series Wardrobe and 12" wide Elite Box Locker doors.

MAGNUM STUDENT SERIES HDV LOCKERS which include our deep-drawn seamless stainless steel recessed handle with single-point latching, and a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Magnum Series doors.

STANDARD FOR WARDROBE DOORS



Deep-drawn 304 stainless steel recessed handle with multi-point gravity lift-type latching includes our antimicrobial recessed handle finger lift cover for protection against bacteria

STANDARD



12 gauge latch hook is welded to frame

STANDARD



16 gauge continuous piano hinge

STANDARD FOR BOX DOORS



Single-point thru-the-door finger pull padlock hasp is standard for HDV box doors 18" high and under



FEATURES

BODY CONSTRUCTION: (Wardrobe & Box lockers): Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Wardrobe Lockers (doors 20" and higher) - Deep-drawn seamless stainless steel recessed handle, Box lockers - Single-point thru-the-door finger pull padlock hasp

HINGES: 16 gauge continuous piano type

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Gravity lift-type multi-point spring loaded latching:

- 3-point latching for openings 48" high and higher,
- 2 point latching for openings 20" high thru 36" high

Lock Bars are fabricated from G90 galvanized steel and are installed into the door after paint.

HOOKS: 2-single hooks and 1-double hook is standard.

- 1- double hook only for triple tier 1-double
- 1-double & 1- single hook for 9" wide openings 30" and higher
- Box lockers no hooks

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

AMP LOCKER ACCESSORIES



SPECIFICATIONS

1 - 6" Closed Front Base (KD lockers only): Shall be fabricated of 16 gauge cold rolled sheet steel flanged on all four sides for rigidity. Front bases include projecting tabs on side flanges designed to align with holes in front legs allowing front bases to be snapped into place requiring no additional fasteners. Side bases are to be included at all exposed ends and are bolted to front and rear legs. Finish to match lockers.

2 - 4" Continuous Z-Base (KD lockers only): Shall be fabricated from 16 gauge cold rolled sheet steel fabricated in 72" lengths, flanged at the top to form a 1-3/8" toe space and at the bottom allowing concealed fastening to the finished floor. Continuous Front Bases include holes for use with splice plates where bases are joined end-to-end. End Bases are to be included at all exposed ends. Where additional support is desired, End Bases may be substituted for splices at Continuous Front Base joints. Finish to match lockers.

3 - 20 gauge Individual Slope Top (KD lockers only): Not less than 20 gauge cold rolled sheet steel, 18 degree pitch, fabricated to be installed individually over each locker. Slope top is formed to include a full back. Individual Slope Tops are to be installed in addition to the locker flat top. End closures are to be provided at exposed ends. Finish to match lockers.

4 - 18 gauge Continuous Slope Top: Not less than 18 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.


4 - 16 Gauge Continuous Slope Top: Not less than 16 gauge cold rolled sheet steel, 18 degree pitch, in 72" lengths. A splice cover with concealed spring clip is to be used to cover joints where Continuous Slope Tops are joined end-to-end. To be installed in addition to the locker flat top with end closures for support. Finish to match lockers.


5 - Recessed Trim: Fabricated of 16 gauge cold rolled sheet steel. 3" wide side trim shall be notched at the top and include a retainer to allow the 3" wide top trim to fit snugly into the side trim. Recess trim is designed to be used when the lockers are installed with the locker fronts flush with the top and side walls. The top and side trim will project 3/8" beyond the side and top walls and include return bends back to the walls. Finish to match lockers.

6 - Minimum Punched End Panel (KD lockers only): Shall be from 18 gauge cold rolled steel and formed to fit tightly over the universal side panel at exposed row ends. Holes are provided at perimeter for fastening to locker. Minimum Punched End Panels are designed to cover all fasteners other than those at the perimeter of the panel. Finish to match lockers. Provide at all exposed ends.

7 - Boxed End Panel: Shall be "Boxed" type formed from 16 gauge cold rolled steel with 1" O.D. double bends on sides and a single bend at top and bottom with no exposed holes or bolts. If lockers have slope tops, end panels must be formed with slope at top to cover the ends of the slope tops. Finish to match lockers. Provide at all exposed ends.

8 - Fillers: Provide where indicated, of not less than 16 gauge cold rolled sheet steel, factory fabricated and finished to match lockers.

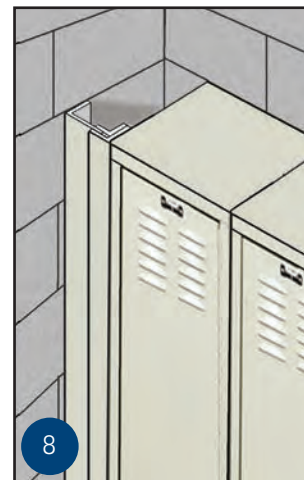



DOOR VENTILATION OPTIONS



Plain Doors
(Quiet)



Louvered Doors
(Classic)



Louvered Doors
(With Door Stiffener)



Diamond Perforated
Doors
(High Ventilation)



Diamond Perforated
Doors
(With Door Stiffener)



Secure-Air-Flow Doors
(Mini Louvers)



Safety-View Doors
(See-thru Polycarbonate Insert)



Safety-View Plus Box Doors
(See-thru Polycarbonate Door)
12" wide x 12" high and
12" wide x 18" high
KD box doors only



Hybrid Red Oak Plain
Door



Hybrid Red Oak Panel
Door

ROUNDED CORNERS AND HEMMED EDGES!



**4 MODELS &
24 COLORS**



Primary
Cubbie

Primary II
Cubbie

Primary Jr.
Cubbie

Backpack
Cubbie



MODEL SIZES	WIDTH	DEPTH	HEIGHT
Primary Cubbie	12", 15"	12", 16"	48"
Primary II Cubbie	12", 15"	12", 16"	48"
Primary Jr. Cubbie	12", 15"	12", 16"	24"
Backpack Cubbie	15", 18"	12", 16"	48"

FEATURES


BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded edges are safe to the touch.

BODY STYLES: Open design, 4 body styles.

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety.

NOTES: Easily secures to wall and floor for added safety, low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.





LOCKER BENCHES, PEDESTALS & LOCKS



4805 HEAVY DUTY STEEL PEDESTAL
Fabricated from 14 ga tube steel with 11 ga formed flanges.
Color: Parchment



4825 STAINLESS STEEL PEDESTAL
Fabricated from 16 ga stainless steel. Designed for movable and fixed use.
Color: Unpainted




8032 ADJUSTABLE STEEL PEDESTAL
With cast aluminum base and concealed anchoring to floor.
Color: Parchment




4810 EXTRA HEAVY-DUTY CAST IRON PEDESTAL
With 6" diameter top and bottom flanges with three anchoring holes.
Color: Parchment



4820 ALUMINUM MOVABLE PEDESTAL
Includes holes for optional permanent anchoring to floor.
Color: Parchment

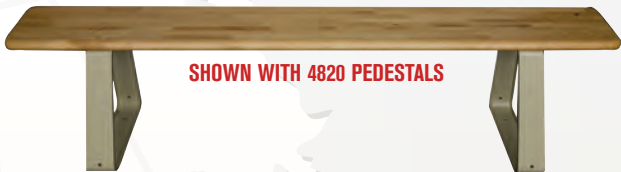

SHOWN WITH 4820 PEDESTALS

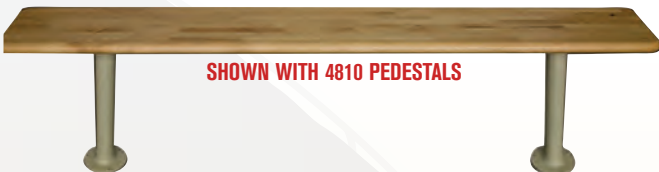

SHOWN WITH 4810 PEDESTALS

LOCKER BENCHES are 9-1/2" wide x 1-1/4" thick and made from laminated white northern hard wood. They are finished with one coat deep penetrating hot sealer and two coats of heavy body high impact hot hydraulically applied lacquer. Bench tops are standard in one foot increments from 3' thru 15'. Non-standard lengths are available on special order (pedestal requirement will be for next standard size up).



BENCH TOP LENGTH	3' - 8'	9' - 14'	15'
PEDESTALS REQUIRED	2	3	4

NOTE: Bench top lengths over 15' will be supplied in sec-

ZEPHYR LOCK

1930 Built-in Combination Lock w/Control Key Override



FEATURES:

- Antimicrobial option available for added protection and safety
- Ergonomic dial with grip ring and non-slip coating
- 7 pre-set combinations for extended usage
- Can fit on 1/8 standard door without an extension kit
- Supervisory key control
- Automatic locking
- Nut channels for easy installation
- 3-digit combination with 5-pin tumbler key plug
- Similar in operation to Master Lock 1630/1631
- Patented button guard to protect lock function from overstuffed lockers
- All built-in combination locks have a 10-year warranty from time of shipment
- Available ADA compliant models 1930ADA/931ADA

1925 Key Controlled Combination Padlock*

FEATURES

- New patent pending anti-shim feature
- Resists the most common shimming methods
- New case hardened steel post added to shackle for added protection to lock mechanism
- Stainless steel body for greater security and durability
- Hardened steel shackle
- Supervisory key control
- Approved by all locker manufacturers
- Most cost-effective key controlled combination lock solution for lockers
- Available with colored dials (Blue, Red, Green, Gold) call for availability
- All Padlocks have a 5 year warranty from time of shipment





H&H Lockers

CUSTOM WOOD LINE





Single-Tier Two-Person Z Triple-Tier

Plastic Traditional Collection Lockers shown with standard slotted ventilation in Cream #9235.

PLASTIC TRADITIONAL COLLECTION

ASI Plastic lockers are built using a Unibody™ system. The sides and back of the locker are formed from a single piece of HDPE, while the locker door frame is made from one piece of machined HDPE. These features add structural integrity and rigidity. Add to that the highest quality hinges and latches, and ASI solid plastic lockers stand apart as the best in the industry. Plastic Lockers are ideal for high-humidity applications and are backed by a 15-year warranty, as these virtually maintenance-free lockers will never rust, rot, or corrode. Available in multiple standard configurations as well as optional configurations like Lattice Lockers, or doors with other non-standard vents.*

STANDARD FEATURES

- The Unibody™ system—sides and back formed from one sheet of plastic
- The door frame is made from one piece of machined HDPE adds rigidity
- ½" face, ten colors, textured finish
- ¾" one pc. body, tops, bottoms, and shelves, natural color, textured finish
- Rabbetted joinery with stainless steel fasteners
- Black, recessed, vertical acting handle for safety and security with padlock hasp, accepts built-in locks
- Black continuous powder coated hinge
- Self-latching door with multi-point engagement
- Lockers shipped fully assembled as single units
- Color on all non-exposed body parts will be natural white



PLASTIC SLOPE TOP SYSTEM

Newly designed optional locker slope top hoods with pre-cut corner angles and aluminum channels provide a clean, finished appearance.

**Contact your customer service representative to be advised on changes in price and delivery lead times for all non-standard items.*

ADA-compliant lockers are available, visit asi-storage.com



Single-Tier

Triple-Tier

Two-Person Z

Phenolic Traditional Collection Lockers
shown in #3010 Dove Gray.

PHENOLIC TRADITIONAL COLLECTION

Phenolic Lockers are the material of choice when a high degree of design flexibility is desired or where durability and strength are required. These lockers are fabricated to stand the test of time. The dense components, combined with stainless steel fasteners, stand up to the most extreme conditions of moisture and humidity. Phenolic is impact, water, and corrosion resistant, and does not support bacteria. The superior construction and materials used in the locker system make it adaptable to all types of facilities, including health clubs, country clubs, and executive washrooms. Phenolic lockers can easily be customized.*

STANDARD FEATURES

- ½" face, 12 Black Core Phenolic colors
- ½" tops, bottoms, and shelves, Folkstone Celesta
- ¾" sides and back, Folkstone Celesta
- Black powder coated 120 degree swing limit five-knuckle hinges are securely fastened
- Black, recessed, vertical acting handle for safety and security with padlock hasp, accepts built-in locks
- Self-latching door
- 10-year warranty
- Full perimeter ventilation
- Lockers shipped fully assembled as single unit



PHENOLIC SLOPE TOP SYSTEM

Newly designed optional locker slope top hoods with pre-cut corner angles and aluminum channels provide a clean, finished appearance.

**Contact your customer service representative for customization or options not shown in the catalog. Any customization is subject to a change in price and delivery lead times. Now available in Color-Thru Phenolic colors upon request.*

QUICK SHIP METAL LOCKERS



Two-Person Z Single-Tier Four-Tier

*Traditional Collection Lockers
shown in Red #45.*

TRADITIONAL COLLECTION

The visually appealing and very durable Traditional Collection is our most widely distributed locker line. Offering the most value for typical locker applications, this collection is available in a full range of spacious sizes, from single- to six-tier configurations, as well as 16-person and wall-mounted. The addition of our new two-person Z-Locker completes the Traditional Collection.

Featuring 16 gauge louvered doors, frames, and bottoms and 24 gauge tops, sides, backs, and shelves. All traditional lockers come with standard features that outpace the competition.



* STANDARD FEATURES

- 2 mil powder coated in any of 15 designer colors
- Stainless steel recessed handle for safety
- 16 gauge bottom for durability
- Continuous full-length staked piano hinge for security
- Rubber door silencers for quiet operation
- All locker bodies and internal parts are offered in our standard Almond color



KNOCK DOWN LOCKERS — SHIP IN 48 HOURS **ASSEMBLED LOCKERS — SHIP IN 5 WORKING DAYS**

- All QSP orders must be clearly marked Quick Ship or QSP, otherwise the normal production queue will dictate the ship date.
- The standard lead time for knock down QSP lockers is 2 working days after receipt of order.
- Shop drawings will not be provided for QSP orders.
- Assembled lockers of 50 frames or less require 5 working days. Add 1 working day for removal of legs.
- Maximum standard QSP order size is 50 frames. Orders larger than 100 frames will be processed as production orders. Contact your customer service representative for inventory availability beyond standard limits.

**48 hour shipping for Traditional Collection is available in single- to six-tier configurations and in six colors, see sizes on pages 20-21 and colors on page 16.*

- ASI Storage Solutions reserves the right to assign warehouse FOB point based on inventory availability.

See complete details at asi-storage.com

AVAILABLE QUICK SHIP METAL COLOR SIZES

Sizes (Inches)	Traditional						Traditional Plus		Competitor					
	Almond	Gray	Blue Frost	Charcoal	White	Black	Almond	Gray	Almond	Gray	Blue Frost	White	Charcoal	Black
	03	25	36	23	29	11	03	25	03	25	36	29	23	11
Single Tier														
12x12x66	✓	✓	✓	✓	✓	✓								
12x15x66	✓	✓	✓	✓	✓	✓								
12x18x66	✓	✓	✓	✓	✓	✓								
15x15x66	✓	✓	✓	✓	✓	✓								
15x18x66	✓	✓	✓	✓	✓	✓								
12x12x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x15x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x18x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
15x15x78	✓	✓	✓	✓	✓	✓								
15x18x78	✓	✓	✓	✓	✓	✓								
18x18x78	✓	✓	✓	✓	✓	✓								
Double Tier														
12x12x66	✓	✓	✓	✓	✓	✓								
12x15x66	✓	✓	✓	✓	✓	✓								
12x18x66	✓	✓	✓	✓	✓	✓								
12x12x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x15x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x18x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
15x15x78	✓	✓	✓	✓	✓	✓								
15x18x78	✓	✓	✓	✓	✓	✓								
18x18x78	✓	✓	✓	✓	✓	✓								
3 Tier														
12x12x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x15x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12x18x78	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
4 Tier														
12x12x66	✓	✓												
12x15x66	✓	✓												
12x18x66	✓	✓												
12x12x78	✓	✓	✓	✓	✓	✓								
12x15x78	✓	✓	✓	✓	✓	✓								
12x18x78	✓	✓	✓	✓	✓	✓								
5 Tier														
12x12x66	✓	✓	✓	✓	✓	✓								
12x15x66	✓	✓	✓	✓	✓	✓								
12x18x66	✓	✓	✓	✓	✓	✓								
6 Tier														
12x12x78	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓
12x15x78	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓
12x18x78	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓
4 Wall Mount														
45x18x13	✓	✓				✓								
16 Person														
69x18x78	✓	✓				✓								

NOTE: The 66" and 78" height indicated for lockers above includes 6" legs. If requested, and clearly marked on the order form, ASI Storage Solutions will remove legs - converting a 66" high locker to a 60" high locker, and a 78" high locker to a 72" high locker. Removal of legs may add up to 1 additional working day to our 48 Hour shipping schedule.